



## EVO200

available Summer 2019



### EVO200DC

- with summer bypass and frost-stat
- efficient, low energy solution to controlling condensation and pollution in residential properties up to 120m<sup>2</sup>
- up to 94% heat exchange efficiency
- variable choice of low (trickle), boost and purge speed at installation
- for ceiling, loft or void installation
- low noise levels
- low running costs
- complies with Building Regulations Parts L1A 2013 and F 2013
- manufactured in UK to ISO 9001
- accurate commissioning via remote LCD commissioning unit



## EVO200


available Summer 2019

### GENERAL FEATURES

- up to 74 litre/sec at 50Pa - max 81 litre/sec capacity
- sfp down to 0.64 W/l/s
- summer bypass which allows the two airflows to bypass the heat exchanger automatically when internal and external temperatures are between adjustable setpoints.
- frost-stat - proportionally reduces intake motor speed as temperature falls - activated when the outside temperature between +8°C and -3°C.
- run-time and power outage counters
- easy to install and maintain for ceiling, loft or void in-line installation
- variable low (trickle), boost and purge options for each motor
- boost speed can be activated by a 230V switched live from:
  - A light switch (if more than one light switch is used, each one must be a double pole switch)
  - Remote humidistat (230V - DRH240)
  - Passive infra red (230V - PIRFF)
  - Thermostat (230V - THM)
  - Remote switch/pull cord - 230V
- very low noise levels
- low running costs
- 5 year warranty - 1 year parts and labour, 4 years parts only

### TECHNICAL FEATURES

- compact low profile unit - only 200mm deep
- spigot size 204mm x 60mm
- casing from galvanised sheet steel
- thermo-acoustic lining
- pre-wired for easy electrical connection
- low energy EC brushless motor with single width, single inlet, direct drive, backward curved impellers
- operates in temperature up to 50°C
- easy to access standard, disposable G3 filters
- counter flow heat exchanger
- all models bottom access only

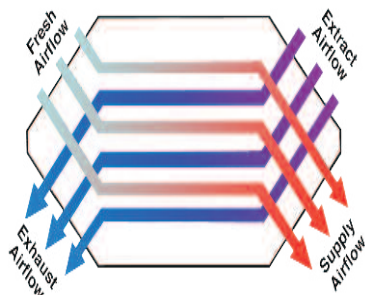

### MODELS AVAILABLE:

- EVO200DC/BABY - bottom access, bypass
- EVO200DC/LBYH - bottom access, left hand, bypass, humidistat
- EVO200DC/RBYH - bottom access, right hand, bypass, humidistat

### CONTROL FEATURES - STANDARD

- independent variable speed adjustment for each motor for trickle, boost and purge speeds.
- adjustable boost speed over-run timer from 0 to 90 minutes.
- adjustable boost speed delay from 0 to 5 minutes
- remote purge - adjustable over-run timer from 0 to 250 minutes, pre-set to 15 minutes (adjustable at factory).
- adjustable night time boost and purge inhibitor
- integral frost-stat - proportionally reduces intake motor speed as temperature falls
- automatic summer bypass

### CONTROL FEATURES - FACTORY SET

- change of ductwork handing on humidistat version (trip point can be set at manufacture)
- integral humidistat - proportionally increases motor speeds with rising humidity
- 0-10V connections can be added for:
  - BMS - for remote motor shut-off
  - CO<sub>2</sub> detector
  - home automation system
  - external pre-heater
- 3 speed selector switch
- remote purge
- purge speed over-run time
- holiday mode for reduced speeds when property is unoccupied (factory set option) - default setting is 50% of trickle speed
- run-time and power outage counters downloadable via QR code.

### COMPLIES WITH

- Part L1A 2013 of Building Regulations for enhanced energy saving capability
- Part F 2013 of Building Regulations for reliable, efficient ventilation
- EU RoHS Directive Compliant.
- Complies with IEC60335-2-80, LVD2006/95/CE and EMC2014/30/UE (European Directive against radio interference and electro-magnetic compatibility)
- manufactured in UK to ISO 9001
- CE marked

TYPICAL SPECIFICATION AVAILABLE AT

<http://www.vectaire.co.uk/downloads>

Vectaire Ltd can supply all accessories for use with these units, including product filters, air filter cassettes, silencers, fire dampers, air valves, ducting, outside grilles and wall cowls. Additionally, Vectaire offers a design service to ensure that the unit installed is the best possible to provide efficient, effective, low energy and low running cost ventilation. Vectaire can also organise installation, commissioning and maintenance of these products



# EVO200

available Summer 2019

TECHNICAL CHARACTERISTICS										
Model	Airflow l/sec					Total Power - Watts				
	100%	80%	60%	40%	20%	100%	80%	60%	40%	20%
EVO200	81	61	41	23	7	101	52	24	9	2

EVO200		Sound Power Levels, $L_w$ [dB] - Octave Bands Frequency Hz.								Sound Pressure dBA @ 3m
Curve Ref		63	125	250	500	1k	2k	4k	8k	
100% (81 l/sec)	Extract	63	61	63	64	61	59	60	50	33.8
	Supply	68	66	68	69	66	64	65	55	
	Breakout	66	59	55	50	41	33	28	16	
80% (61 l/sec)	Extract	59	57	58	59	56	53	52	41	29.0
	Supply	64	62	63	64	61	58	57	46	
	Breakout	62	55	50	45	36	27	20	7	
60% (41 l/sec)	Extract	54	53	53	53	50	47	43	32	23.8
	Supply	59	58	58	58	55	52	48	37	
	Breakout	57	51	45	39	30	21	11	< 5	
40% (23 l/sec)	Extract	47	48	45	45	41	37	31	18	16.7
	Supply	52	53	50	50	46	42	36	23	
	Breakout	50	46	37	31	21	11	< 5	< 5	
20% (7 l/sec)	Extract	34	37	32	31	25	21	11	4	<10.0
	Supply	39	42	37	36	30	26	16	9	
	Breakout	37	35	24	17	5	< 5	< 5	< 5	

The breakout dB(A) sound pressure values are given for hemispherical free field propagation at a distance of 3m from the unit

RESULTS for SAP CALCULATIONS						
ENERGY LEVEL PERFORMANCE - using rigid ducting only						
Exhaust Terminal Configuration	2009 Data			2012 Data		
	Airflow [l/sec]	Specific Fan Power [W/l/sec]	Heat Exchange Efficiency	Airflow [l/sec]	Specific Fan Power [W/l/sec]	Heat Exchange Efficiency
Kitchen + 1 additional wet room	15	0.64	94%	21	0.70	93%
Kitchen + 2 additional wet rooms	21	0.70	93%	29	0.85	93%
Kitchen + 3 additional wet rooms	27	0.80	93%	37	1.06	92%
Kitchen + 4 additional wet rooms	33	0.95	92%	45	1.29	91%
Kitchen + 5 additional wet rooms	39	1.12	92%			
Kitchen + 6 additional wet rooms	45	1.29	91%			


Figures at minimum flow rate conditions - tested by our own laboratory




# EVO200

available Summer 2019

## PERFORMANCE (curves are for guidance only)

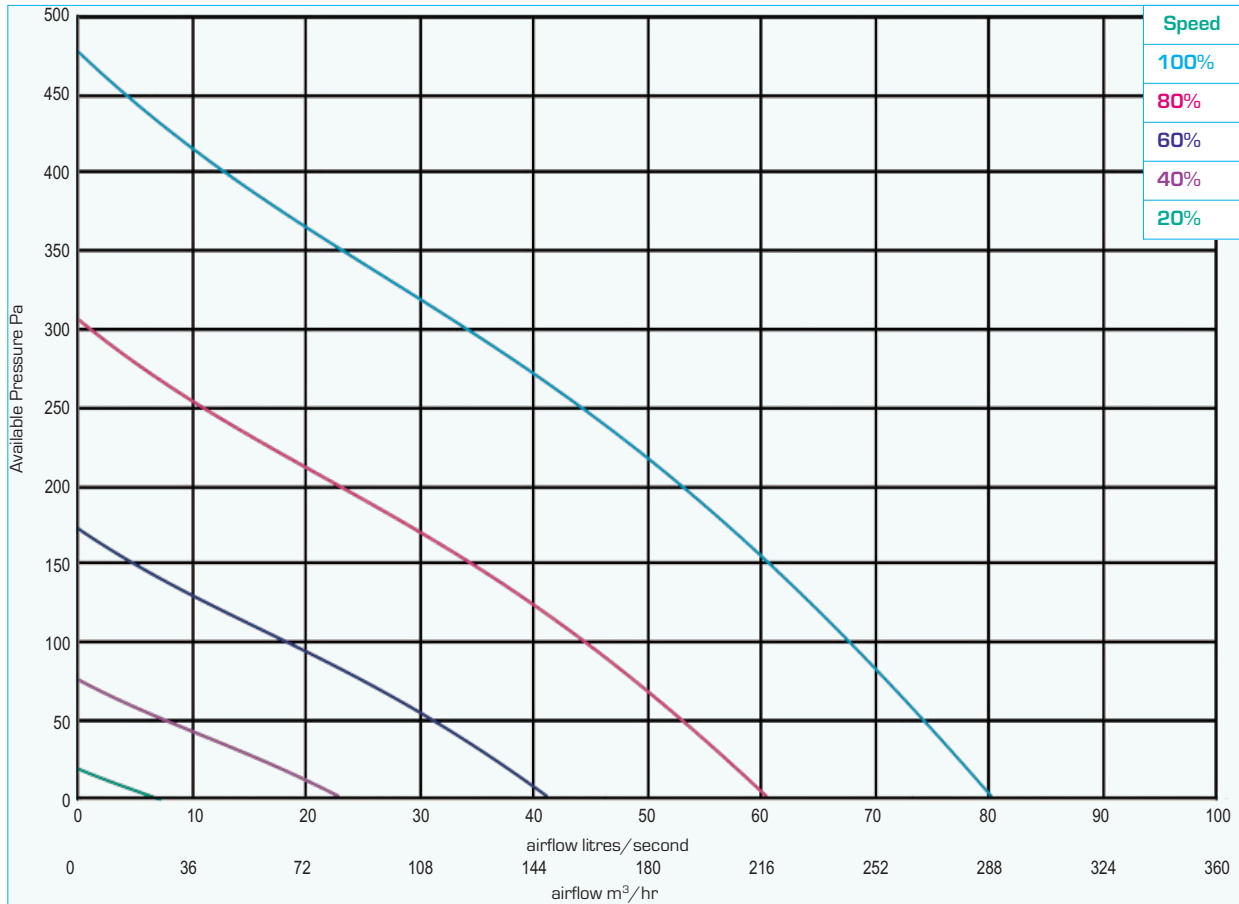

## DIMENSIONS - mm

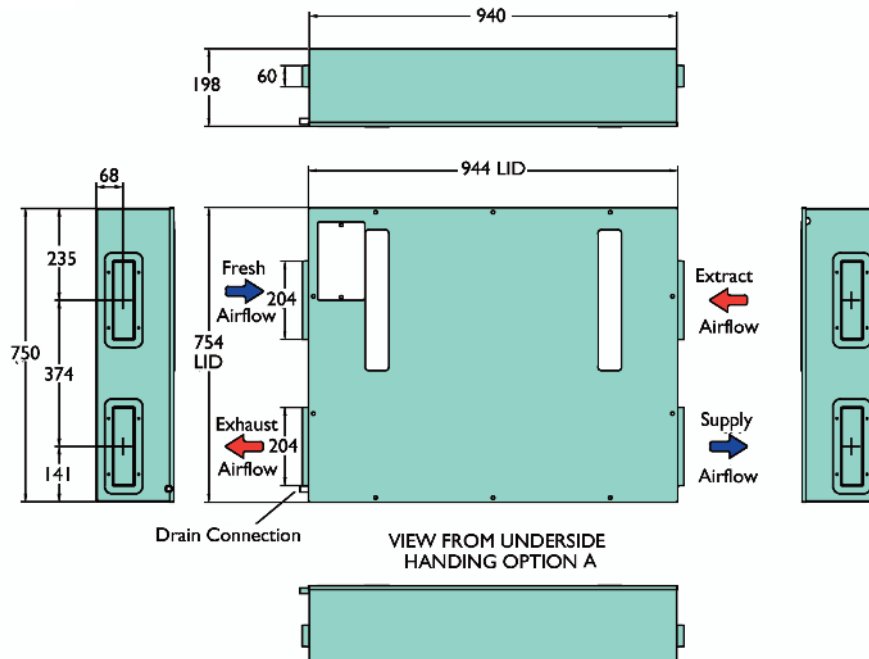

**N.B** a clearance of at least 944L x 754W x 400H mm should be available on each side of the cabinet to allow access to the motors