


Cool Breeze



reducing
the risk of
over-heating
in residential
properties

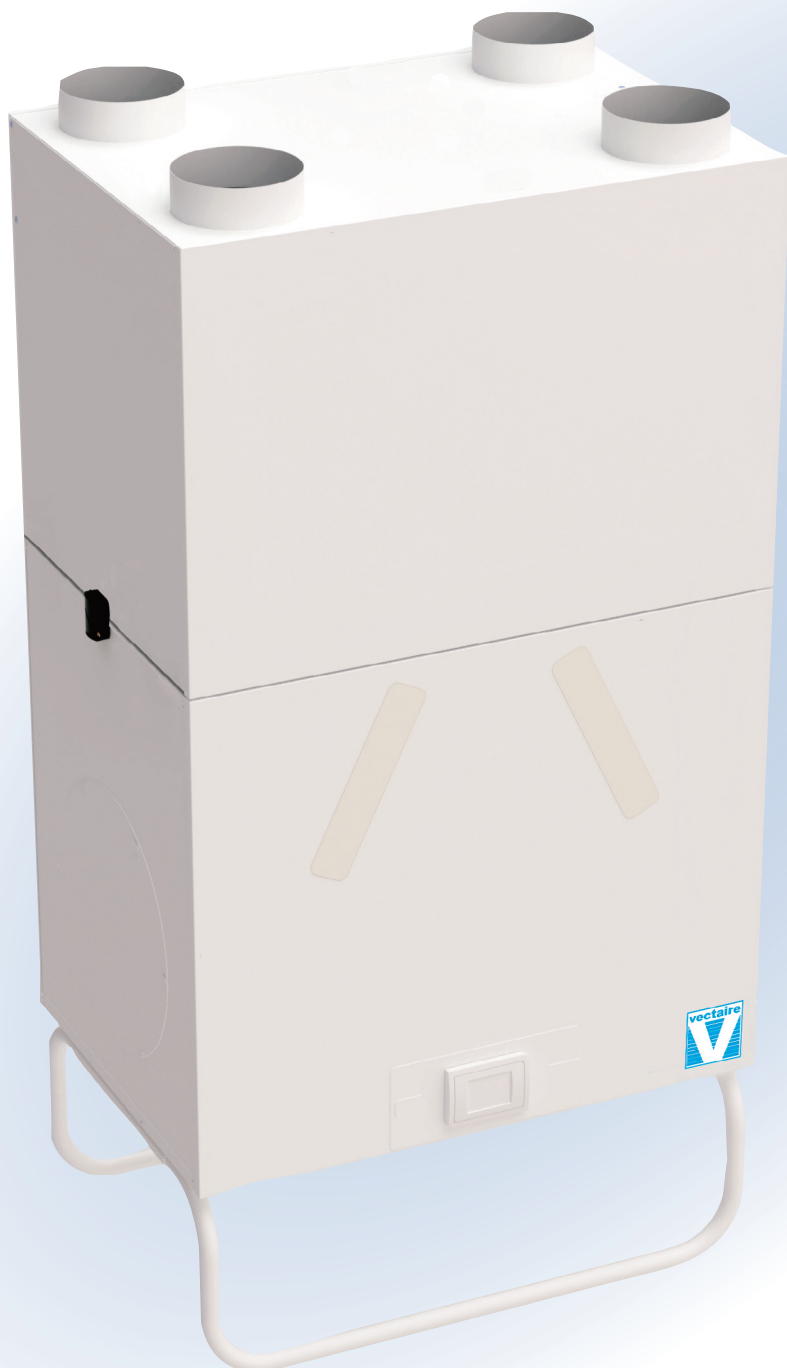

Cool Breeze



The **Cool Breeze** has been designed to provide an effective solution for mitigating overheating in residential properties, particularly during summer months. It meets the standards used in **CIBSE TM59** assessments and **Approved Document O** of the Building Regulations.

Designed for seamless integration with the **Vectaire Maxi MVHR** range, the **Cool Breeze** offers a compact, energy-efficient, and compliant approach to indoor temperature regulation.

The **self-contained, sealed-for-life system**, delivers up to **4.1 kW of total cooling capacity** without the need for an external condenser.

The **Cool Breeze** automatically senses the room temperature and that of the incoming fresh air to determine when cooling is required.

It removes heat from the supply air allowing the MVHR to distribute the cooled air throughout the property, providing a consistently comfortable indoor environment for residents.

The Vectaire range of MVHRs has been designed to ensure good indoor air quality in every type of domestic environment. They comply with UK Building Regulations for mechanical ventilation with heat recovery.

The system is ideally suited for use in new-build and retrofit applications where regulatory compliance and system efficiency are critical.

HOW THE COOL BREEZE WORKS



above temperatures for reference only

Cool Breeze



COOL BREEZE FEATURES


- Up to 4.1 kW of total cooling provided
- Fresh air supply is lowered by up to 20°C
- Uses R290 - eco friendly, natural refrigerant - over 225 times more environmentally friendly than R32
- **COP up to 4.3**
- **GWP Rating 3**
- **EER up to 3.2**
- Automatic control of supply temperature via integral sensor - no false activation from poorly sited external thermostat
- Optional manual override for user preference
- Universal handing via intelligent software
- Very quiet integral condenser
- Front access for servicing
- Wall or floor installation (with appropriate wall bracket or floor stand)

MAXI MVHR FEATURES


- High quality, energy efficient EC motors with low specific fan power
- 92% efficient counter-flow heat exchanger
- Very low noise levels
- Enhanced acoustic option available
- Fully automatic summer bypass
- Intelligent software for independent motor control
- 0-10V connections can be used for:
 - BMS - for remote motor shut-off
 - CO₂ detector
 - home automation system
- Tool free front filter access
- External pre-heater option
- Passive House Certified option
- **Manufactured in the UK**
- **Cool Breeze Registered Design**

INSTALLATION OPTIONS

Wall

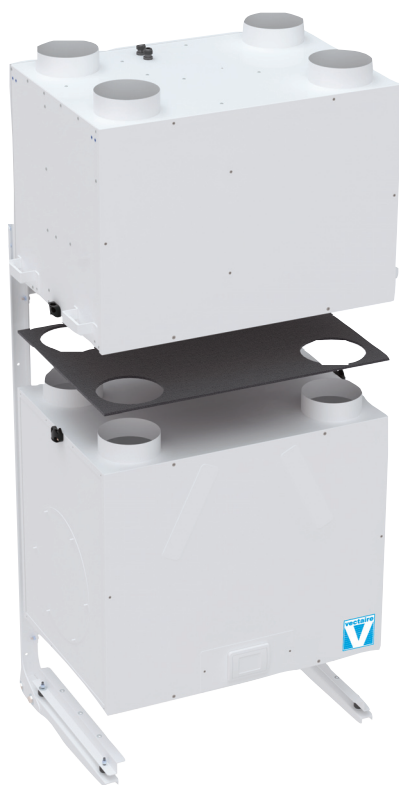

Floor

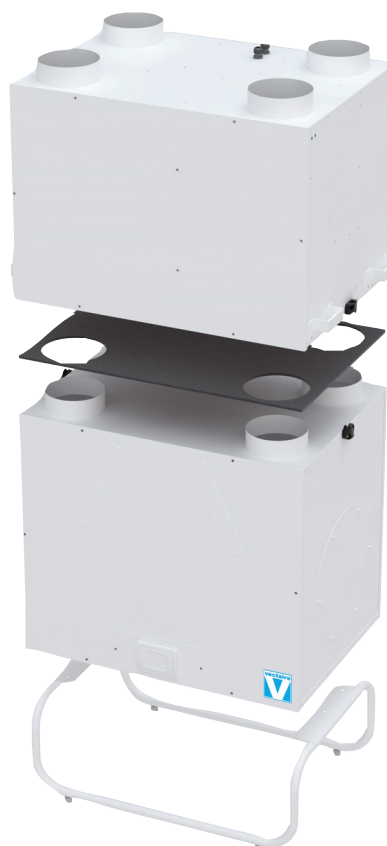

Cool Breeze



COOLING DATA

External Temperature 28°C		Airflow l/sec					
Internal Temp		60	70	80	90	100	110
23°C	Combined Cooling Power (kW)	1.30	1.48	1.65	1.78	1.90	2.03
	Supply Air °C	10.1	10.6	11.0	11.7	12.3	12.8
	Total Cooling Power @ 50%RH (kW)	1.43	1.62	1.81	1.96	2.09	2.23
24°C	Combined Cooling Power (kW)	1.25	1.43	1.60	1.73	1.85	1.98
	Supply Air °C	10.8	11.2	11.5	12.1	12.7	13.1
	Total Cooling Power @ 50%RH (kW)	1.37	1.57	1.76	1.90	2.03	2.18
25°C	Combined Cooling Power (kW)	1.22	1.40	1.57	1.70	1.82	1.93
	Supply Air °C	11.2	11.5	11.8	12.4	13.0	13.5
	Total Cooling Power @ 50%RH (kW)	1.34	1.54	1.72	1.87	1.99	2.12
26°C	Combined Cooling Power (kW)	1.20	1.37	1.53	1.66	1.78	1.89
	Supply Air °C	11.5	11.9	12.2	12.8	13.3	13.8
	Total Cooling Power @ 50%RH (kW)	1.32	1.50	1.68	1.82	1.95	2.08

External Temperature 30°C		Airflow l/sec					
Internal Temp		60	70	80	90	100	110
23°C	Combined Cooling Power (kW)	1.43	1.63	1.83	1.99	2.14	2.28
	Supply Air °C	10.3	10.7	11.1	11.7	12.3	12.9
	Total Cooling Power @ 50%RH (kW)	1.57	1.80	2.01	2.19	2.35	2.51
24°C	Combined Cooling Power (kW)	1.39	1.58	1.77	1.93	2.08	2.22
	Supply Air °C	10.9	11.3	11.7	12.3	12.8	13.3
	Total Cooling Power @ 50%RH (kW)	1.52	1.74	1.95	2.12	2.29	2.44
25°C	Combined Cooling Power (kW)	1.36	1.55	1.72	1.88	2.02	2.16
	Supply Air °C	11.2	11.7	12.2	12.8	13.3	13.8
	Total Cooling Power @ 50%RH (kW)	1.50	1.70	1.89	2.06	2.22	2.37
26°C	Combined Cooling Power (kW)	1.34	1.52	1.69	1.83	1.96	2.09
	Supply Air °C	11.5	12.0	12.5	13.2	13.8	14.3
	Total Cooling Power @ 50%RH (kW)	1.48	1.68	1.86	2.02	2.15	2.30

External Temperature 32°C		Airflow l/sec					
Internal Temp		60	70	80	90	100	110
23°C	Combined Cooling Power (kW)	1.50	1.71	1.90	2.06	2.21	2.38
	Supply Air °C	11.3	11.9	12.4	13.1	13.7	14.2
	Total Cooling Power @ 50%RH (kW)	1.65	1.88	2.08	2.27	2.43	2.61
24°C	Combined Cooling Power (kW)	1.46	1.67	1.88	2.04	2.19	2.34
	Supply Air °C	11.9	12.3	12.6	13.3	13.9	14.4
	Total Cooling Power @ 50%RH (kW)	1.60	1.84	2.06	2.24	2.41	2.57
25°C	Combined Cooling Power (kW)	1.44	1.65	1.85	2.01	2.15	2.30
	Supply Air °C	12.1	12.5	12.9	13.6	14.2	14.7
	Total Cooling Power @ 50%RH (kW)	1.59	1.82	2.03	2.21	2.37	2.53
26°C	Combined Cooling Power (kW)	1.42	1.62	1.81	1.97	2.12	2.26
	Supply Air °C	12.4	12.9	13.3	13.9	14.5	15.1
	Total Cooling Power @ 50%RH (kW)	1.56	1.78	1.99	2.17	2.33	2.48



COOLING DATA cont

External Temperature 34°C		Airflow l/sec					
Internal Temp		60	70	80	90	100	110
23°C	Combined Cooling Power (kW)	1.60	1.83	2.04	2.23	2.41	2.59
	Supply Air °C	11.9	12.4	12.9	13.5	14.1	14.6
	Total Cooling Power @ 50%RH (kW)	1.76	2.01	2.24	2.45	2.65	2.84
24°C	Combined Cooling Power (kW)	1.58	1.80	2.00	2.19	2.37	2.56
	Supply Air °C	12.2	12.8	13.3	13.9	14.4	14.8
	Total Cooling Power @ 50%RH (kW)	1.74	1.98	2.20	2.41	2.61	2.81
25°C	Combined Cooling Power (kW)	1.56	1.79	2.01	2.18	2.32	2.51
	Supply Air °C	12.5	12.9	13.2	14.0	14.8	15.2
	Total Cooling Power @ 50%RH (kW)	1.72	1.97	2.21	2.39	2.55	2.76
26°C	Combined Cooling Power (kW)	1.54	1.76	1.97	2.13	2.29	2.46
	Supply Air °C	12.8	13.3	13.7	14.4	15.1	15.5
	Total Cooling Power @ 50%RH (kW)	1.69	1.93	2.16	2.35	2.51	2.71

TECHNICAL DATA

FLC - Amps	Power - Watts	Max Cooling Capacity - Kilowatts
4.8	700	4.1

SOUND DATA *		Sound Power Levels, L_W - dB-Octave Bands Frequency Hz								Sound Pressure dBA @ 3m
Curve Ref		63	125	250	500	1k	2k	4k	8k	
100% 140 l/sec	Extract	52	57	61	58	59	58	55	50	38.6
	Supply	57	61	64	60	59	55	50	43	
	Breakout	58	60	61	56	44	39	30	21	
80% 110 l/sec	Extract	48	53	55	53	54	52	49	42	36.7
	Supply	53	57	58	55	54	49	44	35	
	Breakout	57	60	58	54	43	37	28	22	
60% 80 l/sec	Extract	42	47	48	46	47	45	40	32	34.5
	Supply	47	51	51	48	47	42	35	25	
	Breakout	57	60	56	52	42	35	26	22	

* data from our own laboratory




MAXI - RESULTS for SAP CALCULATIONS
ENERGY LEVEL PERFORMANCE - using rigid ducting only

	2009 Data		2012 Data		SAP 10 Data	
Exhaust Terminal Configuration	Specific Fan Power (W/l/sec)	Heat Exchange Efficiency	Specific Fan Power (W/l/sec)	Heat Exchange Efficiency	Specific Fan Power (W/l/sec)	Heat Exchange Efficiency
Kitchen + 1 additional wet room	0.43	92%	0.45	92%	0.45	92%
Kitchen + 2 additional wet rooms	0.40	92%	0.47	92%	0.47	92%
Kitchen + 3 additional wet rooms	0.42	92%	0.54	91%	0.54	91%
Kitchen + 4 additional wet rooms	0.48	91%	0.66	90%	0.66	90%
Kitchen + 5 additional wet rooms	0.55	91%	0.80	90%	0.80	90%
Kitchen + 6 additional wet rooms	0.63	90%	0.99	89%	0.99	89%
Kitchen + 7 additional wet rooms	0.76	90%	1.21	89%	1.21	89%

Figures at minimum flow rate conditions

COOL BREEZE PERFORMANCE (curves are for guidance only)

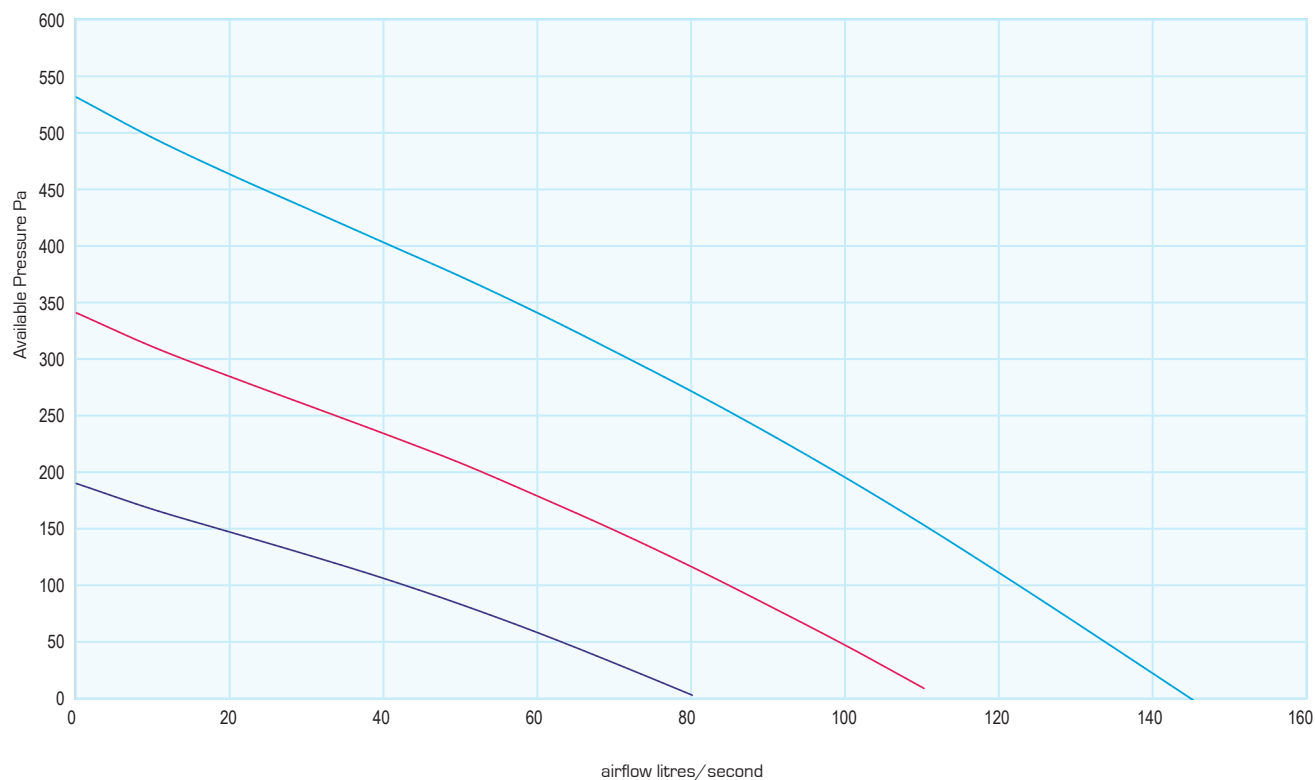


Mitigating over-heating

Cool Breeze




COOL BREEZE DIMENSIONS with MAXI - mm

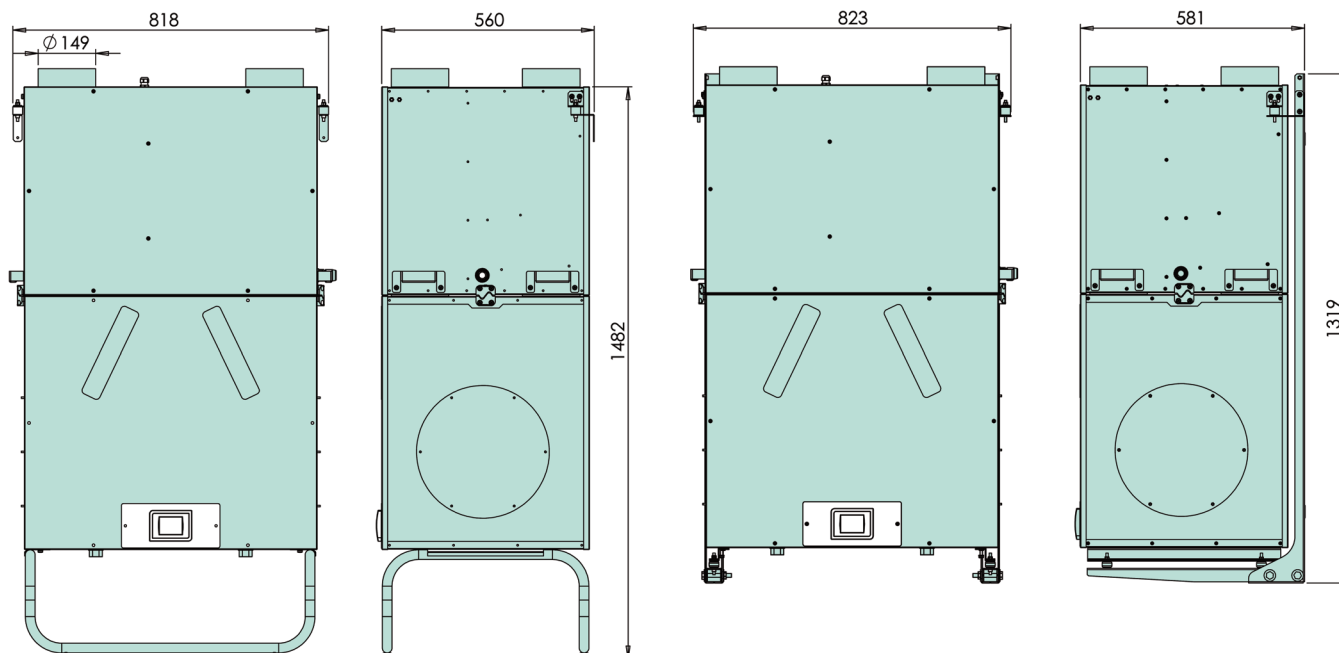

Cooling Unit Weight: 58 kgs
Maxi Weight: 37 kgs
Maxi-AT Weight: 42 kgs

Cool Breeze

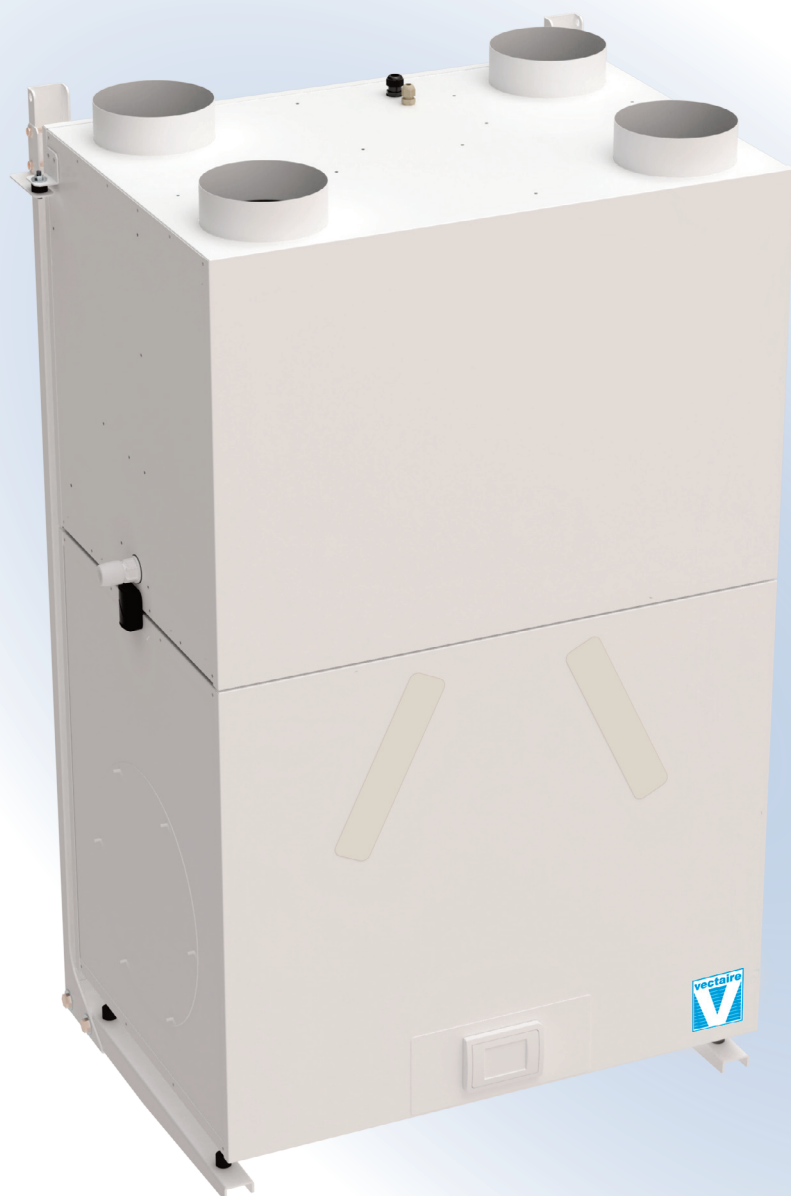

reducing
the risk of
over-heating
in residential
properties



Vectaire Ltd

Lincoln Road
Cressex Business Park
High Wycombe
Buckinghamshire
HP12 3RH

Tel: +44(0)1494 522333

Fax: +44(0)1494 522337

Email: sales@vectaire.co.uk

Web: www.vectaire.co.uk

